


Color
Systems
Advertising



LED Screen
Outdoor & Indoor

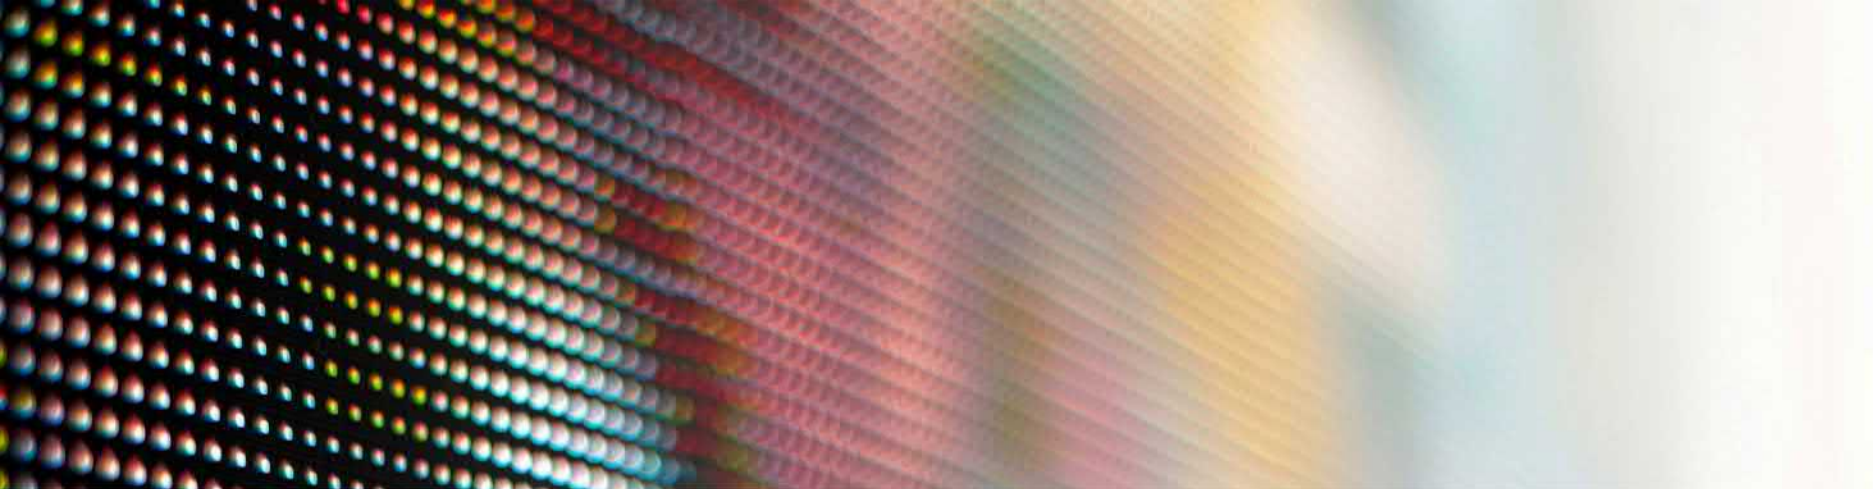

Color Systems provides innovative LED display solutions, offering a diverse range of indoor and outdoor LED display products along with creative display solutions. In addition, we are committed to delivering intelligent software that transforms display products into smart hardware, enhancing their value.



**PRODUCTS
CONTENTS**

01

Permanent

Ares	01-02
Storm	03-04
Reta	05-06
hiLux	07-08
hiLux Pro	09-10
sTile	11-12
Crystal	13-14

02

Rental

Climber	15-16
sPad Pro	17-18

03

Creative

Delivery box	19-20
Soft	21-22
sPoster	23-24
Shelf	25-26

Ares

New DOOH solution, save 50% running cost



VARIOUS APPLICATIONS



FEATURES

Various applications

Billboard / landmark / street display /digital signage / traffi.

Luxury Look

Saving operation cost (shipping cost, labor cost, steel structure cost).

Stable and Reliable Performance

Superior image quality .

More functions

Available for stadium perimeter system
L-type for better immersive watching experiences
Be the best moment for naked-eye 3D image enhancement.

SPECS

Pixel pitch	P3.9mm	P4.8mm	P6.2mm	P7.8mm	P10.4mm
LED Type	SMID1921	SMID1921	SMID2727	SMID2727	SMID2727
Pixel Density(dot/m²)	65,410	42,222	25,600	16,394	9,227
Module Size(mm)	500 x 250	500 x 250	500 x 250	500 x 250	500 x 250
Module Resolution(pixels)	128 x 64	104 x 52	80 x 40	64 x 32	48 x 24
Panel Size(mm)	1000x1000mm/1000x750mm/1000x500mm				
Panel Resolution(pixels)	256x256	208x208	160x160	128x128	96x96
	256x192	208x156	160x120	128x96	96x72
	256x128	208x104	160x80	128x64	96x48
Poewer Consumpiton(avg./max.)	200W/600W				
Material	Aluminum profile				
Panel Weight	23KG/SQM				
Brightness (cd/m²)	6500 - 10000				
Grey Level	16bit				
Input(V)	110-220v,50-60HZ				
Refresh Frequency	3840Hz				
Operating Temperature	- 20 ℃ ~ + 60 ℃				
Ingress Protection	IP65				
Certification	ETL/FCC/CE/CCC				

Storm

Outdoor Advertising LED Display



► Multi-functions

Storm series could be used as perimeter LED system by adding rear support structure and top protection.

• FEATURES

► Die-casting Aluminum Cabinet

Strong cabinet frame for outdoor fixed installation LED display project.

► Light and Slim

Only 29.5KG/cabinet, light weight for fast installation, and saving structure cost.

► Fast Installation

With fast locking system, easy to install a big LED wall.

• PROJECT CASE



• SPECS

Pixel Pitch		P2	P2.5	P3.33	P4	P5	P6.67	P8	P10
Module	LED	SMD1211	SMD1415	SMD1921	SMD1921	SMD2727	SMD3535	SMD3535	SMD3535
	Size(mm)	320x320	160x160	320x160	320x160	320x160	320x160	320x160	320x160
	Resolution	160x160	64x64	96x48	80x40	64x32	48x24	40x20	32x16
	Density(dot/m ²)	250,000	160,000	90,180	62,500	40,000	22,500	15,625	10,000
Cabinet	Size(mm)	960x960	960x960	960x960	960x960	960x960	960x960	960x960	960x960
	Resolution	480x480	384x384	288x288	240x240	192x192	144x144	120x120	96x96
	Material	Die-cast aluminum							
	Module Quantity	9	36	18	18	18	18	18	18
	Weight (kg/panel)	34KG	34KG	34KG	34KG	32KG	32KG	30KG	29.5KG
	Max. Power(w/panel)	1200W	1200W	1200W	1200W	1200W	900W	900W	900W
	Ave. Power(w/panel)	360W	360W	360W	360W	360W	300W	300W	300W
Screen	Maintenance	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear
	Input(V)	110-220	110-220	110-220	110 220	110-220	110-220	110-220	110-220
	Brightness (cd/m ²)	3500	3500	5000	5000	5000	5000	5000	5000
	Driving Mode	Constant Drive	Constant Drive	Constant Drive	Constant Drive	Constant Drive	Constant Drive	Constant Drive	Constant Drive
	Way of Scan	32	8	8	8	8	8	5	4
	Viewing Angle	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°	140°/140°
	Ingress Protection	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
	Grey Level	16bit	16bit	16bit	16bit	16bit	16bit	16bit	16bit
	Refresh Frequency	>1920HZ	>1920HZ	>1920HZ	>1920HZ	>1920HZ	>1920HZ	>1920HZ	>1920HZ
	Operating Temperatrue	-20~60℃	-20~60℃	-20~60℃	-20~60℃	-20~60℃	-20~60℃	-20~60℃	-20~60℃
	Operating Humidity	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%

Reta

Indoor High Resolution LED Screen



• PROJECT CASE



• FEATURES

› Black SMD LED

Black SMD used in Reta as a result of high contrast ratio, non reflection and vivid color visual performance.

› Low brightness with High grayscale

Screen shows vivid color details even shows dark and low brightness video or picture content.

› Front Service

Magnetic LED modules for easy front service.

› Ultra Wide Viewing Angle

Both 140° from horizontal & vertical for the viewing angle.

• SPECS

Pixel Pitch		P1.5	P1.8	P2.0	P2.5
Module	LED	SMD1212	SMD1515	SMD2121	SMD2121
	Size(mm)	320x160	320x160	320x160	320x160
	Resolution	208x104	172x86	160x80	128x64
	Density(dot/m2)	422,500	288,369	250,000	160,000
Cabinet	Cabinet Size(mm)	640x480	640x480	640x480	640x480
	Resolution	416x312	344x258	320x240	256x192
	Material	Die-casting Aluminum			
	Module Quantity	6			
	Weight	7.5KG			
	Max. Power(w/panel)	180W			
Screen	Ave. Power(w/panel)	60W			
	Maintenance	Front			
	Input(V)	110-220			
	Brightness(cd/m²)	800			
	Driving Mode	Constant Drive			
	Viewing Angle	140°/140°			
	Ingress Protection	IP43			
	Grey Level	16bit			
	Refresh Frequency	1920HZ-3840HZ			
	Operating Temperatrue	-20℃ +60℃			
Screen	Operating Humidity	10%-90%			

hiLux

Fine Pitch | Vibrant LED Wall



VARIOUS APPLICATIONS



FEATURES

Various applications

Shopping mall / meeting room /retail /training / public transpo.

Design and Maintenance

Modular design Save on spare parts , Support mixed assembly
Size: 480 x 480mm 960 x 480mm ,Ultra-slim frame 5kgs/panel
High-precision Die-casting aluminum whole panel ,Fast and Seamless
Special slot to make easy installation ,Special mounting frame Convenient, easy installation.

Great Visual Performance

High Definition ,High Contrast ,3840 Hz High refresh rate ,Uniformity
High Reliability Extended LED Life cycle Energy saving and efficient heat-dissipation.

Perfection in visual performance

GOB technology Increase collision resistance, protecting LEDs from being knock High contrast, increase 20% contrast.

SPECS

Pixel Pitch	P1.29	P1.57	P1.87	P2.5
Model	1.29mm	1.57mm	1.87mm	2.5mm
LED lamp	SMD1010	SMD1212	SMD1515	SMD2121
Density(dots/㎡)	600925	401084	284444	160000
Module size (mm)	240x240	240x240	240x240	240x240
Module resolution (pixels)	186x186	152x152	128x128	96x96
Cabinet size (mm)	960/480 x 480	960/480 x 480	960/480 x 480	960/480 x 480
Cabinet resolution (pixels)	744/372 x 372	608/304 x 304	512/256 x 256	384/192 x 192
Cabinet Weight (kg)	12KGS / 6KGS			
Viewing angle	H:160°, V:160°			
Refresh rate	3840Hz			
Brightness (cd/㎡)	600 — 800			
Power Consumption (max. / avg.)	600W / 220W			
Grey level	16bit			
Input voltage	AC220V/50Hz			
Maintenance way	Front			
Ingress Protection	IP43			
Working Temp	-20℃ ~ +45℃			
Working Humidity	10% ~ 60%RH			
Certification	ETL/FCC/CE/CCC			

hiLux Pro

Full HD, GOB Fine Pitch Indoor LED Video Wall



FEATURES


Various applications

Monitoring room / Corporate / Meeting room / broadcasting /TV .

Design and Maintenance

High-precision Die-casting the whole panel, 5.5KG Ultra slim
Power box built -in Fast and simple installation, Cableless Convenience
and stable.

VARIOUS APPLICATIONS

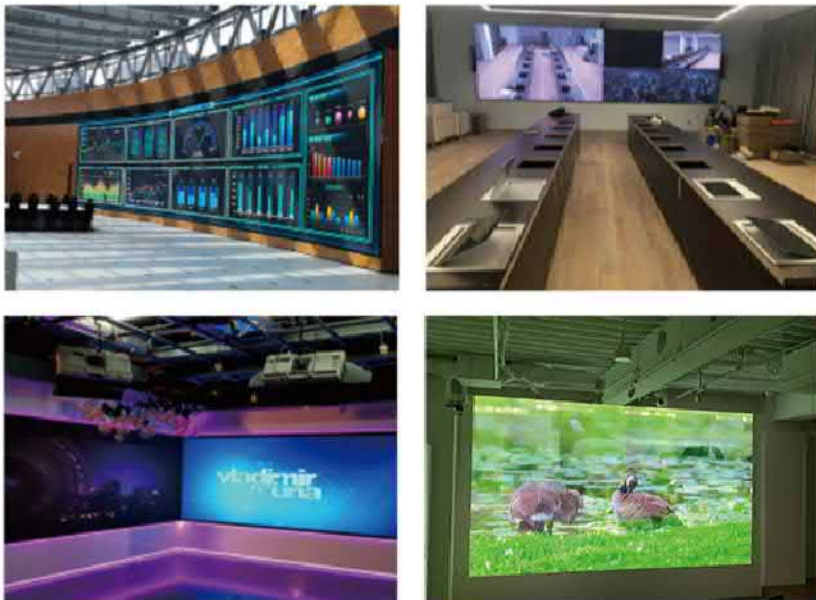

16:9 ratio in Panel design, native 4K

Standard 27", FHD/4K pixel to pixel
Panel size: 600x337.5mm (23.6" x 13.2").

Perfection in visual performance

Standard 16:9 ratio in panel design, native 4K
True Color, perfection in visual performance
GOB Technology- waterproof & anti-crash,High contrast, increase 20%
contrast.

SPECS

Pixel Pitch	P0.9	P1.25	P1.56	P1.87
Model	0.93mm	1.25mm	1.56mm	1.87mm
LED lamp	Mini 4in1	SMD1010	SMD1212	SMD1515
Density(dots/㎡)	1152000	640000	409600	285967
Module size (mm)	300 ×168.75	300 ×168.75	300 ×168.75	300 ×168.75
Module resolution (pixels)	320 x 180	240 x 135	192 x 108	160 x 90
Cabinet size (mm)	600x337.5	600x337.5	600x337.5	600x337.5
Cabinet resolution (pixels)	640 x 360	480 x 270	384 x 216	320 x 180
Cabinet Weight (kg)	5.8	5.6	5.5	5.5
Viewing angle	H:160°, V:160°	H:160°, V:160°	H:160°, V:160°	H:160°, V:160°
Refresh rate	3840Hz	3840Hz	3840Hz	3840Hz
Brightness (cd/㎡)	600	600	600-800	600-800
Power Consumption (max. / avg.)	550W / 220W			
Grey level	16bit			
Input voltage	AC220V/50Hz			
Maintenance way	Front			
Ingress Protection	IP43			
Working Temp	-20℃ ~+45℃			
Working Humidity	10%~60%RH			
Certification	ETL/FCC/CE/CCC			

sTile

Indoor Front Service LED Display



• PROJECT CASE



• FEATURES

› Ultra Light & Slim

Compare with traditional screen, sTile is much lighter and slimmer.

› Various Cabinet Sizes

500x250/750x250/1000x250 (mm*mm)

› Less Steel Sturcture Needed

Less steel sturcture consumption, save the back space and the cost.

› Various Installation Ways

Wall mounting, stacking or hanging installation.

› Wide Applications

sTile can be widely used in shopping mall, subway, cinema, meeting room, airport etc.

• SPECS

Pixel Pitch		P1.9	P2.6	P3.9
Module	LED	SMD1515	SMD2020	SMD2020
	Size(mm)	250x250	250x250	250x250
	Resolution	132x132	96x96	64x64
	Density(dot/m ²)	270,400	147,456	65,536
Cabinet	Standard Size(mm)	1000x250	1000x250	1000x250
	Resolution	528x132	384x96	256x64
	Optional Cabinet Size(mm)	750x250/500x250	750x250/500x250	750x250/500x250
	Material	Aluminum	Aluminum	Aluminum
	Module Quantity	3/4	3/4	3/4
	Weight	5KG/6KG	5KG/6KG	5KG/6KG
	Max. Power(w/panel)	160W / 180W	160W / 180W	160W / 180W
	Ave. Power(w/panel)	50W / 60W	50W / 60W	50W / 60W
Screen	Maintenance	Front	Front	Front
	Input(V)	110-220	110-220	110-220
	Brightness (cd/m ²)	600-800	800-1000	800-1000
	Driving Mode	Constant Drive	Constant Drive	Constant Drive
	Way of Scan	33	27	16
	Viewing Angle	140°/140°	140°/140°	140°/140°
	Ingress Protection	IP43	IP43	IP43
	Grey Level	16bit	16bit	16bit
	Refresh Frequency	>1920HZ	>1920HZ	>1920HZ
	Operating Temperatrue	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
	Operating Humidity	10%-90%	10%-90%	10%-90%

Crystal

High brightness and high transparency rate indoor transparent LED display




Side emitting LED lamps



Waterproof & Customized size

Waterproof,Dustproof,Anti-crash,Customized size

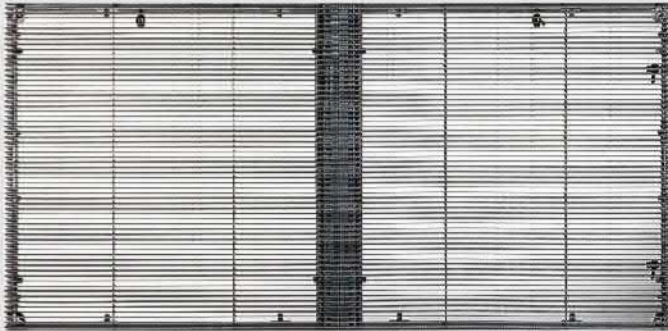

PROJECT CASE




SPECS

Pixel Pitch		P3.96x7.81	P5.2x7.8	P6.9x7.8	P10.4	P16.66
Module	Size(mm*mm)	500x250	500x250	500x250	500x250	500x250
	Resolution	126x32	96x32	72x32	48x24	30x15
	Density(dot/m²)	32,256	24,576	18,432	9,216	3,600
	Horizontal Pixel Pitch	3.96mm	5.2mm	6.9mm	10.4mm	16.66mm
	Vertical Pixel Pitch	7.8125mm	7.8125mm	7.8125mm	10.4mm	16.66mm
	SMD Type	SMD3512				
Cabinet	Cabinet Size(mm)	1000x500/1000x1000				
	Cabinet Material	Aluminum				
	Weight (KG/Panel)	6.5/13	6.5/13	6.5/13	6/11.5	6/11.5
	Max. power consumption	690	670	670	670	650
	Avg. power consumption	160 W				
Screen	Brightness (cd/m²)	> 5,500				
	Refresh Rate	>1920HZ				
	Transparency Rate	68%	71%	75%	82%	86%
	Viewing Angle	140°V / 120°H				
	Packing Way	Plywood case / Flight case				
	Input (V)	110-220				
	Driving Mode	Constant Drive				
	Ingress Protection	IP43				
	Grey Level	16bit				
	Operating Humidity	10%-90%				
	Operating Temperature	-20~60 °C				

Climber

Inventive Indoor & Outdoor Rental LED Panel

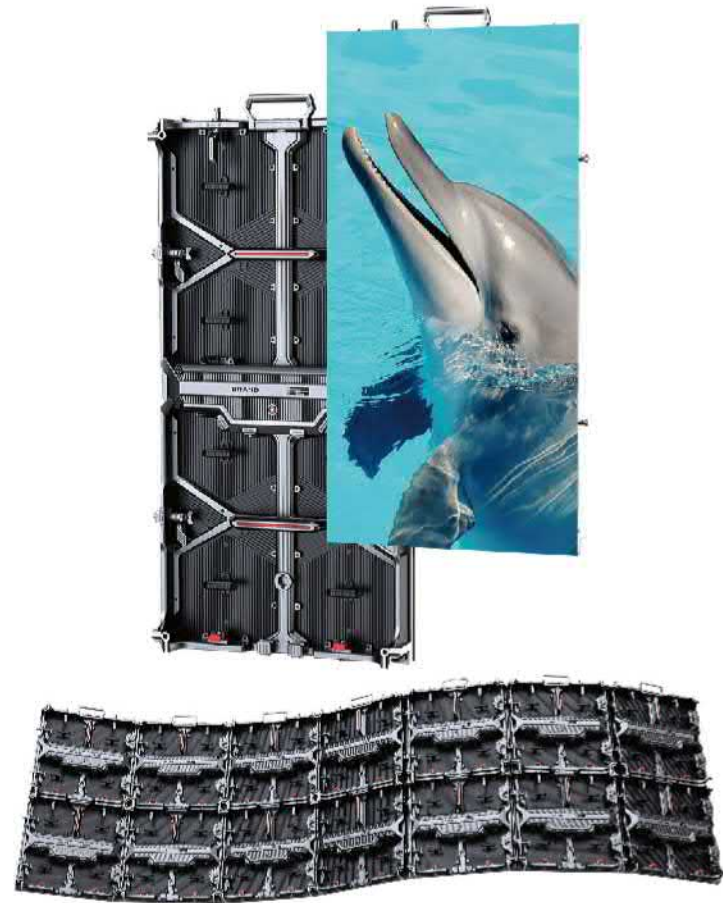

FEATURES

Various applications

Senimars/Lauching ceremony/ Press conferences/ Summits/Virtual Productions/Digital Art Collections

Climber – Artistic design

The Climber modules and panel frames are designed to accommodate either a flat or curved, with solutions for wall-mounting stacking or hanging, the sPad Pro Plus can be placed in any environment to create eye-catching and immersive effects.

Stunning Visual Performance

Climber offers a high contrast ratio and a wide color gamut, delivering a high-definition viewing experience with unmatched color accuracy.

Creative Production Made Easier

HDR Technology
Degree Adjustable Lock
In and Outdoor Events.

VARIOUS APPLICATIONS



SPECS

Pixel Pitch		Indoor P1.9	Indoor P2.9	Indoor P3.9	Outdoor P2.9	Outdoor P3.9	Outdoor P4.8
Module	LED	SMD1515	SMD2020	SMD2020	SMD1921	SMD1921	SMD1921
	Size(mm)	250x500	250x500	250x500	250x500	250x500	250x500
	Resolution	128x256	84x168	64x128	84x168	64x128	52x104
	Density(dot/m2)	262,144	112,896	65,536	112,896	65,536	43,264
Cabinet	Cabinet Size(mm)	500x500	500x500	500x500/1000	500x500/1000	500x500	500x500/1000
	Resolution	256x256	168x168	128x128/128x256	168x168	128x128/128x256	104x104/104x208
	Material	Die-casting Aluminum					
	Module Quantity	2	2	2 / 4	2	2 / 4	2 / 4
Screen	Weight	7.5KG	7.5KG	8KG	8KG / 13KG	8KG / 13KG	8KG / 13KG
	Max. Power(w/panel)	130W	130W	260W	260W / 520W	260W / 520W	260W / 520W
	Ave. Power(w/panel)	75W	75W	130W	130W / 260W	130W / 260W	130W / 260W
	Input(V)	110-220	110-220	110-220	110-220	110-220	110-220
Screen	Brightness(cd/m²)	800-1000	800-1000	800-1000	4,500	4,500	4,500
	Viewing Angle	160°/160°					
	Ingress Protection	IP43	IP43	IP43	IP65	IP65	IP65
	Grey Level	16bit					
Screen	Refresh Frequency	3840HZ					
	Operating Temperatru	-20℃--+60℃					
	Operating Humidity	10%-90%					

sPad Pro

Indoor/outdoor rental solution



• FEATURES

› Various applications

Festivals/Corporate events/Sports Events/Touring productions/Weddings.

› Perfect In-Camera Performance

sPad Pro has a perfect visual effect in-camera shooting, with high refresh rate and a deep black, reduce the ghost and the scanline in camera shooting.

› True Color Visual Experience

sPad Pro is HDR supportive, deliver excellent images with more details and color depth.

› Born for Stage Productions

Build Large LED Wall Fast & Easy
Hanging & Stacking Options
Corner Protector for the lamps at the edge

• VARIOUS APPLICATIONS



• SPECS


Pixel Pitch		Indoor P1.9	Indoor P2.9	Indoor P3.9	Outdoor P2.9	Outdoor P3.9	Outdoor P4.8
Module	LED	SMD1515	SMD2020	SMD2020	SMD1415	SMD1921	SMD1921
	Size(mm)	250x250	250x250	250x250	250x250	250x250	250x250
	Resolution	128x128	84x84	64x64	84x84	64x64	52x52
	Density(dot/m2)	262,144	112,896	65,536	112,896	65,536	43,264
Cabinet	Cabinet Size(mm)	500x500	500x500	500x500/1000	500x500	500x500/1000	500x500/1000
	Resolution	256x256	168x168	128x128/128x256	168x168	128x128/128x256	104x104/104x208
	Material	Die-casting Aluminum					
	Module Quantity	4	4	4 / 8	4	4 / 8	4 / 8
	Weight	7.5KG	7.5KG	7.5KG/12.5KG	8KG	8KG / 13KG	8KG / 13KG
	Max. Power(w/panel)	130W	130W	130W /260W	260W	260W / 520W	260W / 520W
	Ave. Power(w/panel)	75W	75W	75W /130W	130W	130W / 260W	130W / 260W
Screen	Input(V)	110-220	110-220	110-220	110-220	110-220	110-220
	Brightness(cd/m²)	800-1000	800-1000	800-1000	4,500	5,000	5,000
	Driving Mode	Constant Drive					
	Viewing Angle	160°/160°					
	Ingress Protection	IP43	IP43	IP43	IP65	IP65	IP65
	Grey Level	16bit					
	Refresh Frequency	>3840HZ					
	Operating Temperatrue	-20℃+60℃					
	Operating Humidity	10%-90%					

Delivery box

P3mm Digital Delivery Box | Creative LED Display



APPLICATION REFERENC

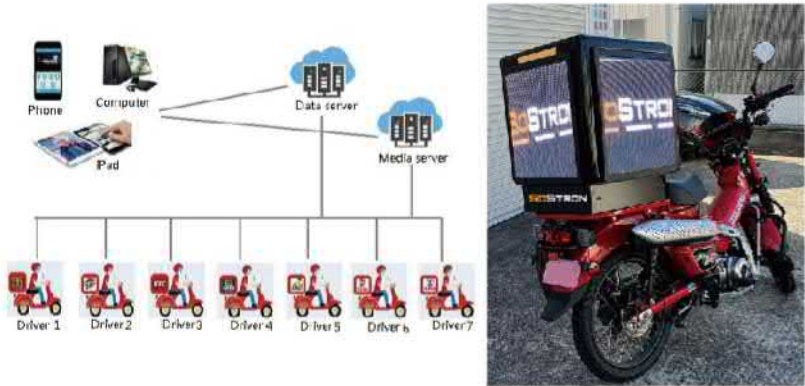

FEATURES

- › **Creative design**
Digital delivery box with three-side LED display on it, showing advertising when delivery man drive motorcycle to the client.
- › **Count Function**
Calculate how many audience all the way.
- › **Compatibility**
Intergrate with your current delivery system.
- › **Plug and Play**
Connect with your motorcycle battery
- › **Location Free for Advertising**
A new and efficient way to showing advertisement anywhere.

SPECS

Pixel Pitch	P2.5mm	P3.0mm
LED Type	SMD1921	SMD1415
Pixel Density(dot/m2)	160,000	110,889
Module Size	160x160mm	192 x 192mm
Screen Size (each side)	320x320mm	384 x 384mm
Screen Resolution (each side)	128 x 128	128 x 128
Box Size(mm)	500 W x 500 H x 500 D mm	500 W x 500 H x 500 D mm
Max. Power Consumption(W/Sets)	350	350
Ave. Power Consumption(W/Sets)	200	200
Operating System	Android System	Android System
Weight	17KG	17KG
Grey Level	14bit	14bit
Driving Voltage(V)	5	5
Input(V)	9-36	9-36
Brightness (cd/m ²)	3500	4,000
Viewing Angle	140 ° /140°	140 ° /140°
Ingress Protection	IP65	IP65
Refresh Frequency	1920HZ	1920HZ
Operating Temperature	-20 ℃ +60 ℃	-20 ℃ +60 ℃
Operating Humidity	10%-90% RH	10%-90% RH

Soft

Indoor Flexible LED DISPLAY FOR Creative LED Screen Installations



• VARIOUS SHAPES



• FEATURES

- **Flexible Panel**
Flexible panel, can match different creative needs.
Make the design more possibilities.
- **Various Shapes**
Soft material can be various shapes, and the curved angles can be adjusted according to different applications.
- **Smooth Surface**
Smooth surface, good flatness can provide you super visual enjoyment.
- **Easy Maintenance**
Magenetic design, light weight, easy to install, transport and maintenance.

• PROJECT CASE



• SPECS


Pixel Pitch		P1.875	P2.0	P2.5	P3.0	P4
Module	LED	SMD1010	SMD1515	SMD2020	SMD2020	SMD2020
	Size(mm)	240x120	240 x 120	240 x 120	240 x 120	240 x 120
	Resolution	128x64	120x60	96x48	80x40	60x30
	Density(dot/m²)	283,024	250,000	160,000	110,224	62,500
Cabinet	Size	Customized based on standard module size				
	Material	Steel				
Screen	Input(V)	110-220				
	Brightness(cd/m²)	600-800				
	Driving Mode	Constant Drive				
	Way of Scan	32	30	24	20	15
	Viewing Angle	140°/140°				
	Ingress Protection	IP43				
	Grey Level	16bit				
	Refresh Frequency	1920-3840HZ				
Operating Temperatrue		-20℃~+60℃				
Operating Humidity		10%-90%				

sPoster


Intelligent LED Poster



WAYS OF INSTALLATION



Mounted



Rigging



Standing

FEATURES

Ultra Slim & Light Weight

sPoster has been engineered with latest technologies to give it a smoother, slimmer profile. It's crafted in beautiful anodized lightweight yet durable aluminum, to make the entire poster frame weigh less than 32kg and only 42mm in depth, making it more portable and easier to install.

Bright, Adjustable & High Protection

Up to 1,200nits brightness, support synchronous asynchronous dual mode function.

Plug & Play Media Player

The second generation sPoster can be integrated with Novastar synchronous and asynchronous control system, can plug and play with zero setting, it's fast and simple for end users maintenance.

Convenient & Multi-function Interface

Supporting vertical, horizontal, wall mounted and hoisting installation.

Cluster Management & Internet

Intelligent cluster management, it can remote centralized management audit, precision marketing mode, to double advertising value.

PROJECT CASE



SPECS

Pixel Pitch		P2.5	P3.0
Module	LED	SMD2020	SMD2020
	Size(mm)	160x160	192x192
	Resolution	64x64	64x64
	Density(dot/m²)	160,000	110,224
Poster	Size(mm)	640x1920	576x1920
	Resolution	256x768	192x640
	Material	Aluminum	Aluminum
	Module Quantity	48	30
	Weight	38KG	32KG
	Max. Power(w/panel)	700W	700W
	Ave. Power(w/panel)	300W	300W
	Maintenance	Front/Rear	Front/Rear
	Input(V)	110-220	110-220
	Brightness(cd/㎡)	800-1,200	800-1,200
	Driving Mode	Constant Drive	Constant Drive
	Way of Scan	16	16
	Viewing Angle	140°/140°	140°/140°
	Ingress Protection	IP43	IP43

16bit

>1920HZ

-20°C~+60°C

10%-90%

16bit

>1920HZ

-20°C~+60°C

10%-90%

Shelf

Indoor sLED Shelf Display



FEATURES

› sLED Shelf Signage

LED digital shelf edge technology capable of delivering dynamic pricing , promotion,product and brand related information at the shelf edge.

› High Resolution

Adopted with GOB technology.
High protection level.
High resolution with 1.8mm pixel.
High contrast ratio: 3000:1.

› Easy Installation & Connection

Easy installation and connection.
Revolutionary design with magnet & shackle.
No need tool, quickly install and remove.

PROJECT CASE



SPECS

Pixel Pitch	P1.8	P1.8	P1.8	P1.8	
Module	LED	SMD0808			
	Size(mm)	150x60			
	Resolution	80x32			
	Density(dot/m²)	283024			
Shelf	Size(mm)	300x60	600x60	900x60	1200x60
	Resolution	160x32	320x32	480x32	640x32
	Material	Aluminum			
	Module Quantity	2	4	6	8
	Weight	0.5KG	0.85KG	1.25KG	1.5KG
	Max. Power(w/panel)	8W	10W	15W	20W
	Ave. Power(w/panel)	5W	8W	12W	15W
	Maintenance	Rear			
	Input (V)	110-220			
	Brightness (cd/m²)	600-800			
	Driving Mode	Constant Drive			
	Way of Scan	16			
	Viewing Angle	140°/140°			
	Ingress Protection	IP54			
	Grey Level	16bit			
	Refresh Frequency	1920HZ			
	Operating Temperatrue	-20℃-+60℃			
	Operating Humidity	10%-90%			















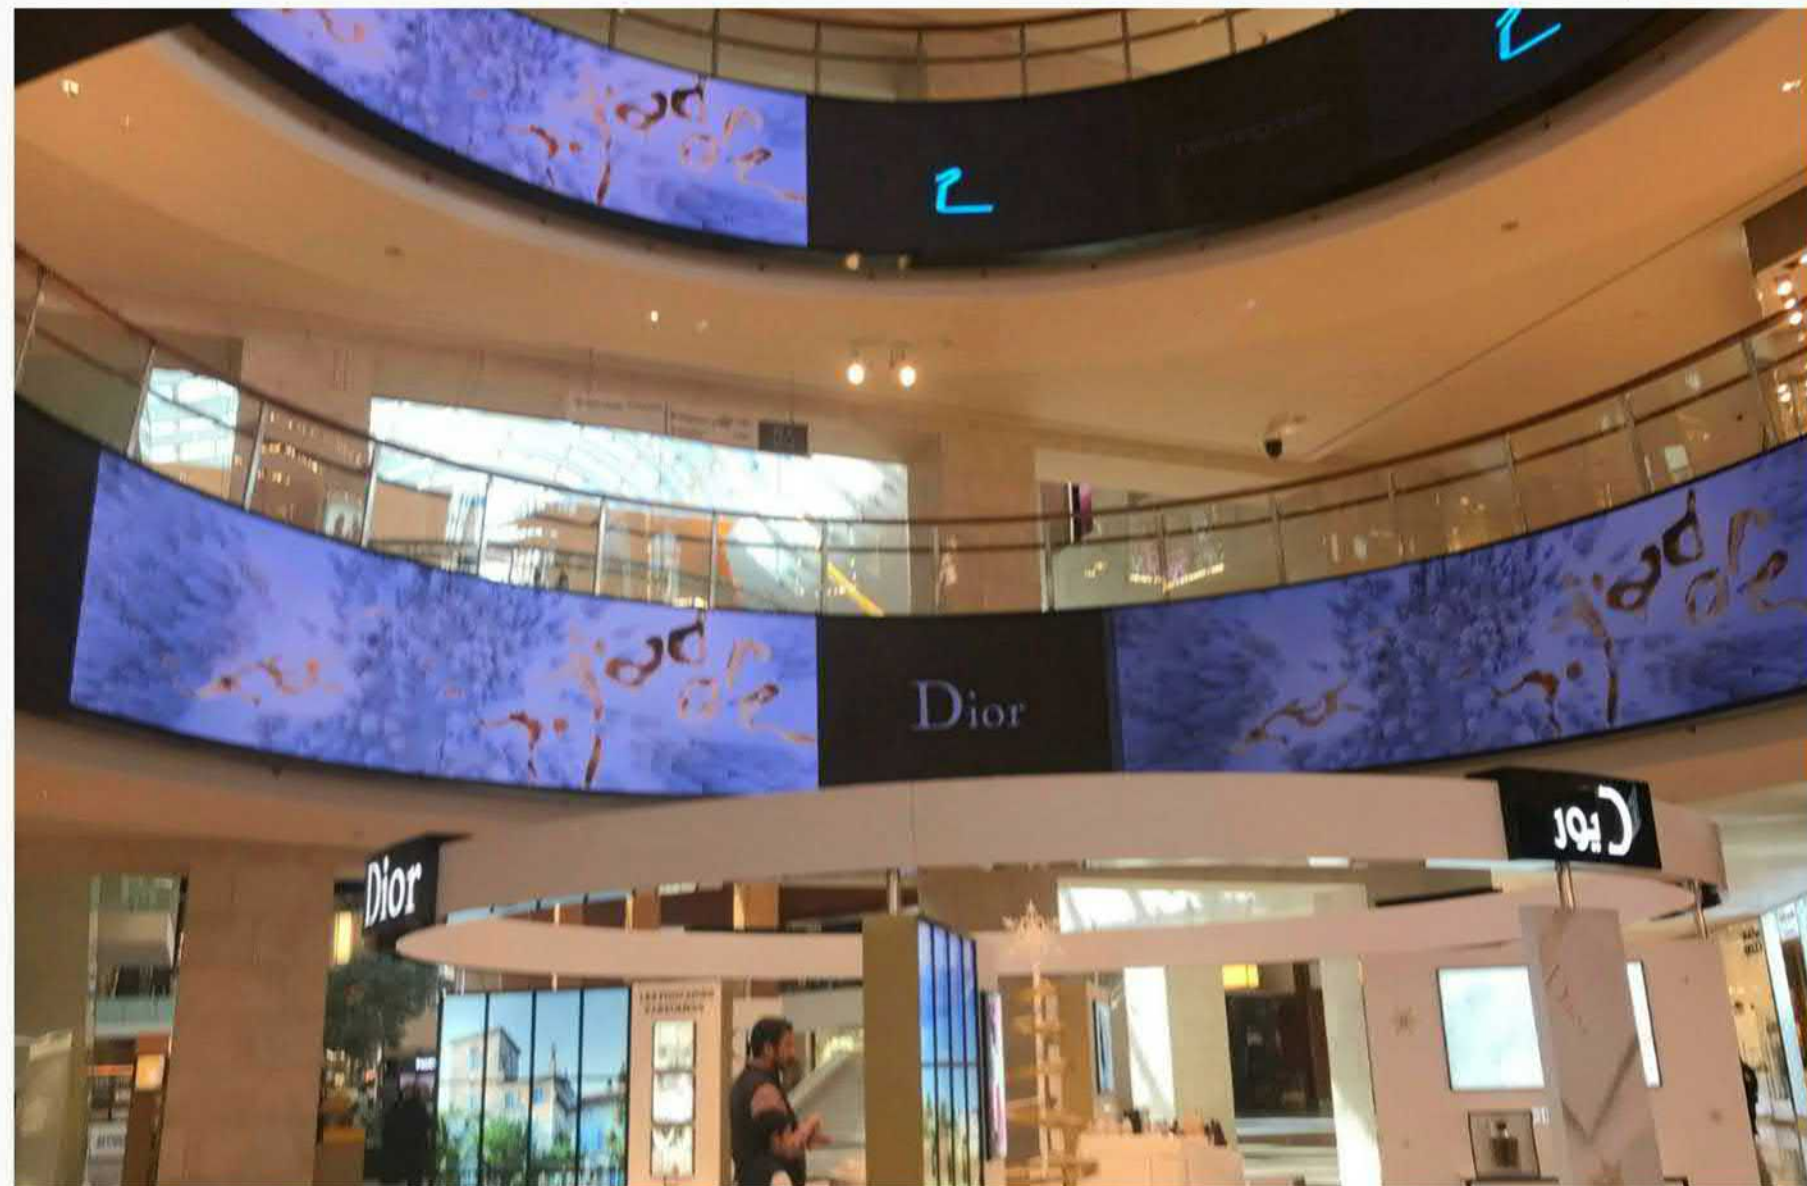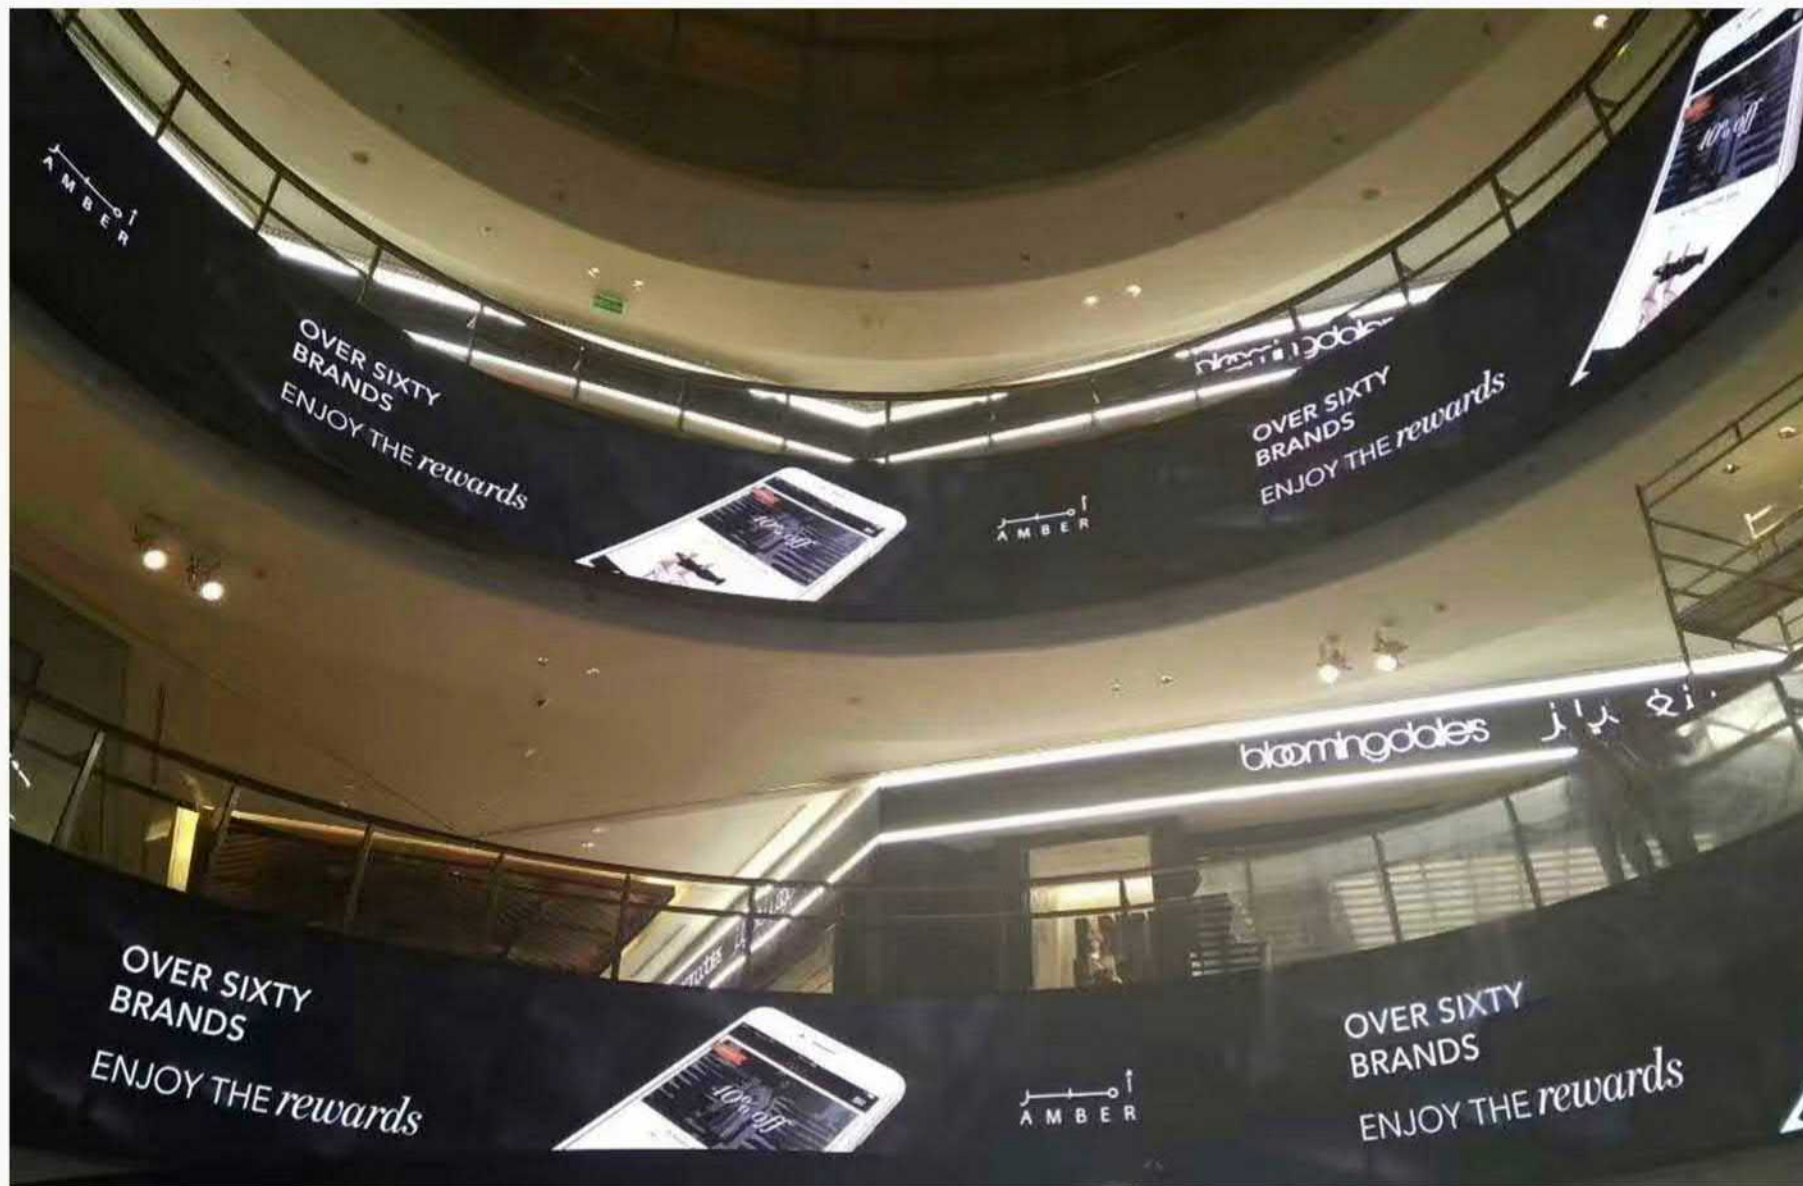







**Color
Systems**
A d v e r t i s i n g



COLOR
SYSTEMS
COMPANY
PROFILE
"ADVERTISING"



COLOR
SYSTEMS
COMPANY
PROFILE
"WOODWORKS"

CONTACT US

 +966 59 521 0094

 INFO@COLORSYSTEMAD.COM

 WWW.COLORSYSTEMAD.COM

 OMAR BIN AL KHATTAB ROAD - AL MALAZ DISTRICT - RIYADH